

INSECT-O-CUTOR®

FLYING INSECT ELECTROCUTORS

HORIZONTAL LOW HEADROOM SERIES 36

UNITED STATES		CANADIAN	MODEL	BLACK LIGHT	METAL
HP MODELS	EE MODELS	MODEL NUMBER	SERIES	ATTRACTION LAMPS	MATERIALS
3692DGA	3694EDGA	3694ECBDGA	36	36 AND 36B	ALUMINIZED STEEL
3692DGS	3694EDGS	3694ECBDGS	36	36 AND 36B	STAINLESS STEEL

TECHNICAL DATA AND ELECTRICAL SPECIFICATIONS

120 VOLT/60 HZ MODELS

PRIMARY: 120 VOLTS, 60 HERTZ SECONDARY: 4500 VOLTS
NOTE: UNIT MUST BE GROUNDED.

TRANSFORMER (WITH INTERNAL CAPACITANCE): T740C
mA OUTPUT: 9.8
AMP. INPUT- HP MODELS: 1.7-1.9 EE MODELS: 1.4-1.5

HIGH PERFORMANCE BALLASTS — ONE OF EACH PER LAMP:
PRIMARY: BP30
AUXILIARY: N/A

ENERGY EFFICIENT BALLAST
— ONE PER UNIT: BPE-30

SHIPPING WEIGHTS:
ALUMINIZED STEEL: 42 LBS/ 19.1 KG
STAINLESS STEEL: 46 LBS/ 20.9 KG

UNIT DIMENSIONS:
43.50" / 110.50 CM WIDE X 12.00" /
30.50 CM HIGH X 8.25" / 21.00 CM DEEP

PACKED CARTON: 4.2 CUBIC FEET /
0.12 CUBIC METERS




220 VOLT/50 HZ MODELS

PRIMARY: 220 VOLTS, 50 HERTZ SECONDARY: 5000 VOLTS
NOTE: UNIT MUST BE GROUNDED.

TRANSFORMER (WITH INTERNAL CAPACITANCE): T1040C-2
mA OUTPUT: 10.0 AMP. INPUT: 0.40

ENERGY EFFICIENT BALLAST (ONE PER UNIT): BPU

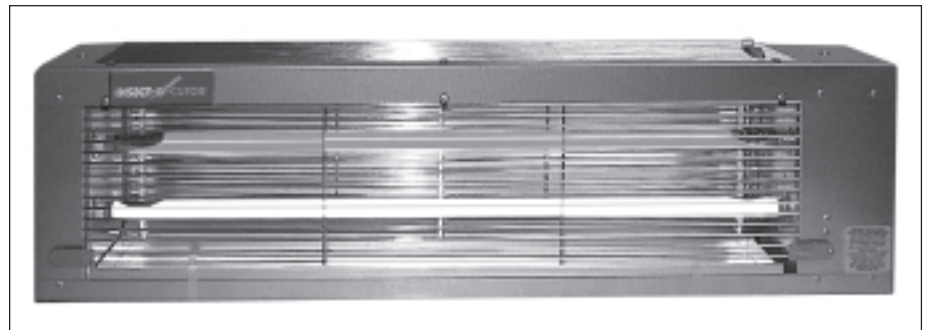

With multi-directional black light emission, typical Horizontal Low Headroom installations include placement in hallways/corridors, above door-jambs, in low ceiling loading docks, workshops, and at temporary work sites.

STANDARD FEATURES: Top, front and rear safety guards; safety switch interrupts electrical current when servicing unit; internal metal insect collection drawer; spring-loaded and fixed lampholder sets for simple lamp installation; three-wire grounded cord and plug. Lift-off backplate for wall mounting. Jacknuts (threaded holes) on unit's top accommodate eyebolts for hanging. Non-abrasive footpegs; carrying handle. Heavy-duty transformer is shunt-protected. 120Volt Models are safety-tested and certified by Intertek Testing Services, N.A. Inc. (ETL™) and by Canadian Standards Association (CSA®).

ENERGY EFFICIENT (EE) MODELS are designed to comply with various energy compliance acts and energy conservation programs. Electronic-ballasted models reduce overall electrical consumption, while increasing light output by 8% to 15% per lamp due to increased operational efficiency. Less energy consumed... more insect attraction light emitted.

HIGH PERFORMANCE (HP) MODELS utilize Ultra High Current (UHC) circuitry to increase black light emission for flying insect attraction. An Insect-O-Cutor® innovation, our UHC circuitry overdrives the insect attraction lamps without shortening lamp life.



Contains Mercury; Dispose According to Local, State or Federal Laws

1641 Lewis Way
Stone Mountain, GA, USA 30083-1107
Phone: (770) 939-2835
Fax: (770) 621-0100
e-mail: info@insect-o-cutor.com

<http://www.insect-o-cutor.com>