

INSECT-O-CUTOR®

FLYING INSECT ELECTROCUTORS

Professional
Pest Control
Products

WALL RECESSED SERIES

MODEL NUMBERS	SERIES	BLACK LIGHT ATTRACTION LAMPS	METAL MATERIALS
18204EDGR	18204ER	18 AND 18B	BEIGE TEXTURED
18204EDGAR	18204ER	18 AND 18B	ALUMINIZED STEEL
18204EDGSR	18204ER	18 AND 18B	STAINLESS STEEL
36204EDGR	36204ER	36 AND 36B	BEIGE TEXTURED
36204EDGAR	36204ER	36 AND 36B	ALUMINIZED STEEL
36204EDGSR	36204ER	36 AND 36B	STAINLESS STEEL

IMPORTANT: WALL RECESSED BODY IN ALUMINIZED STEEL METAL MATERIAL

TECHNICAL DATA AND ELECTRICAL SPECIFICATIONS — ENERGY EFFICIENT MODELS

ELECTRICAL SPECIFICATIONS — UNIT MUST BE GROUNDED.

TRANSFORMER (WITH INTERNAL CAPACITANCE):	T740C
INPUT:	120 VOLTS, 60 HZ	
OUTPUT:	4500 VOLTS — 9.8 MA	
AMPS AT 115V MAX.:	1.4	

ELECTRONIC BALLAST (ONE PER UNIT) —

SERIES 18204ER	BPE18
SERIES 36204ER	BPE30

DIMENSIONS OF WALL RECESSED UNIT —

SERIES 18204ER	13.0" Wide X 28.5" High X 4.125" Deep
SERIES 36204ER	13.0" Wide X 46.5" High X 4.125" Deep

DIMENSIONS OF SAFETY GUARD —

SERIES 18204ER	14.75" Wide X 29.875" High
SERIES 36204ER	14.75" Wide X 47.875" High

SHIPPING WEIGHT —

MODELS 18204EDGR AND 18204EDGAR	21 LBS.
MODEL 18204EDGSR	22 LBS.
MODELS 36204EDGR AND 36204EDGAR	30 LBS.
MODEL 36204EDGSR	32 LBS.


SERIES 18204E AND 36204E are powered by electronic-ballasted circuitry that converts normal 60Hertz line current to 25kHz... for increased operational efficiency — resulting in an 8% to 15% increase in light output.

ADA
DESIGNED TO COMPLY
WITH THE AMERICANS
WITH DISABILITIES ACT

STANDARD FEATURES: The three-wire grounded cord and plug is positioned on top of unit to ensure trouble-free recessing. Tamper-resistant safety guard affixed by four removable screws to allow for routine maintenance. Internal metal insect collection drawer for long life; wraparound reflector panel behind electric grid to increase black light emission; spring-loaded and fixed lampholder sets for simple lamp installation and replacement. Heavy-duty transformer is shunt-protected.

Note the safety guard has slightly larger, overlapping dimensions than the unit. The vertically beveled guard abuts firmly to the wall surface.

INSTALLATION: For stability, the unit body should rest atop a permanent cross-brace/platform secured horizontally within wall opening. The unit body may be adjusted forward or backward upon brace/platform to accommodate proper wall depth. Convenient holes on unit sides (accessible by drill) allow for side-securing to a wall stud/support. Keyhole slots on the back of the unit allow for securing to a vertical surface.

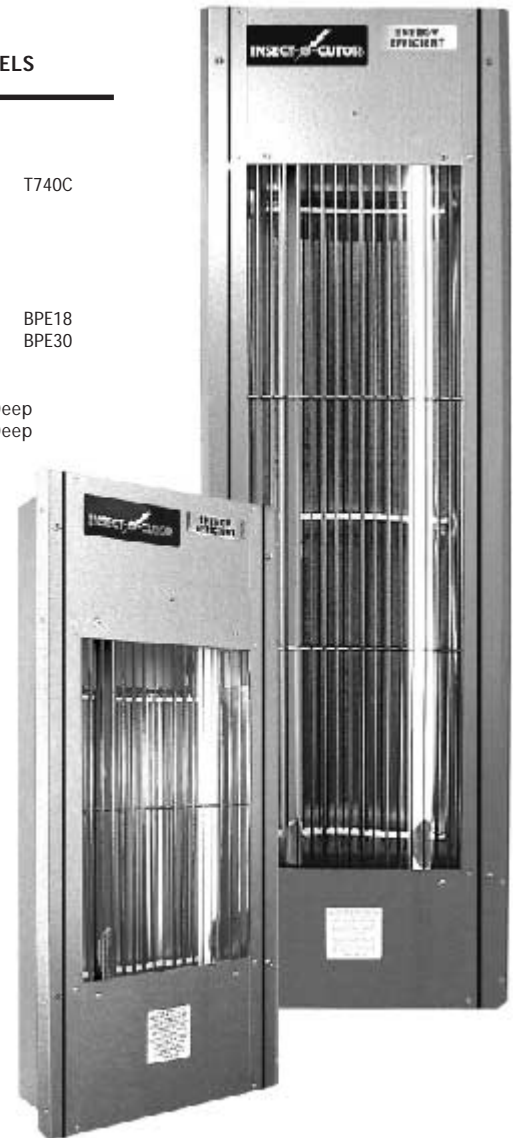

<http://www.insect-o-cutor.com>



1641 Lewis Way
Stone Mountain, GA, USA 30083-1107
Phone: (770) 939-2835
Fax: (770) 621-0100
e-mail: info@insect-o-cutor.com